


YP3002, YP3004

FIRE PANELS

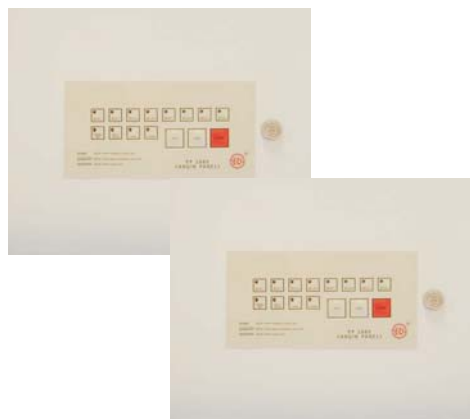

Microprocesor controlled panels
 2 and 4 zones conventional fire alarm panel.
 20 detectors can be connected to each zone and unlimited alarm buttons.
 The system checks the zones and sounder if they are close or open circuit than gives warning with flasher and sounder.
 Battery and energy interruption alarm.
 Can be programmed easily.
 End of line resistor
 Alarm output with relay.
 Minimal dimensions
 Metal box.

Specifications

Technical specifications

	YP3002	YP3004
AC input	:220VAC	:220VAC
DC output	:24VDC	:24VDC
Power consumption	:45W	:45W
Battery type	::2x12V/7Ah	::2x12V/7Ah
Battery low voltage	:21VDC	:21VDC
Zone numbers	:2	:4
Detector connecting per each zones	:20pcs.	:20pcs.
End of line resistor	:10K	:10K
Battery fuse	:2A	:2A
Zone fuse	:500mA	:500mA
Sounder fuse	:1A	:1A
Housing	:Metal box	:Metal box
Dimensions	:350X290X105mm	:350X290X105mm
Colour	:Cream	:Cream
Weight	:4kg	:4.25kg

Environmental


Operating temperature	: -10 C - +45 C	: -10 C - +45 C
-----------------------	-----------------	-----------------

YP3002, YP3004


FIRE PANELS

Connections

YP3002

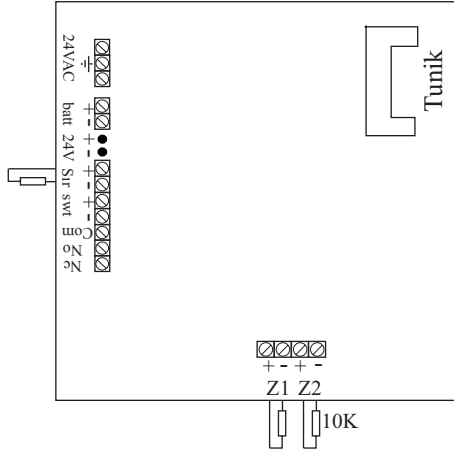

YP3004

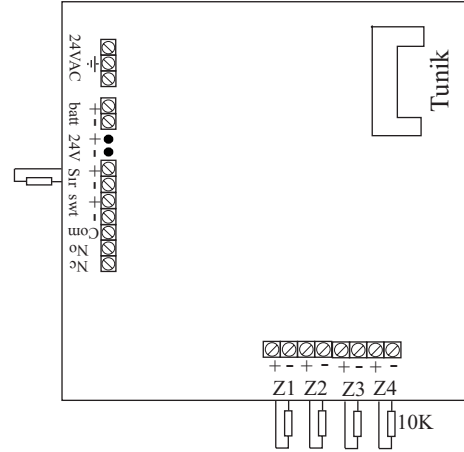

General

Technical specifications

	YP3002	YP3004
Zone number	:2pcs.	:4pcs.
Alarm output	:Dry contact relay	:Dry contact relay
Siren output	:10K ended	:10K ended
End of line resistor	:10K	:10K
Zone LED	:2pcs	:4pcs
Alarm LED	:1pcs	:1pcs
Siren fault LED	:1pcs	:1pcs
Network LED	:1pcs	:1pcs
Charge fault LED	:1pcs	:1pcs
Batt/ground fault LED	:1pcs	:1pcs
Manuel alarm button	:Available	:Available
Button for silencing sounder	:Available	:Available
Reset button	:Available	:Available
Switch	:Available	:Available
Zone open circuit status	:Alarm dedected	:Alarm dedected
Zone short circuit status	:Alarm dedected.	:Alarm dedected.
Siren extinguish	:Available	:Available
Ground fault	:Available	:Available
220VAC interrupted	:Available	:Available
Low battery fault	:Available	:Available
Internal battery box.	:Available	:Available

• Technical specifications are subject to change without prior notice.