


GSM Adapter Mini

TELL

GSM communication

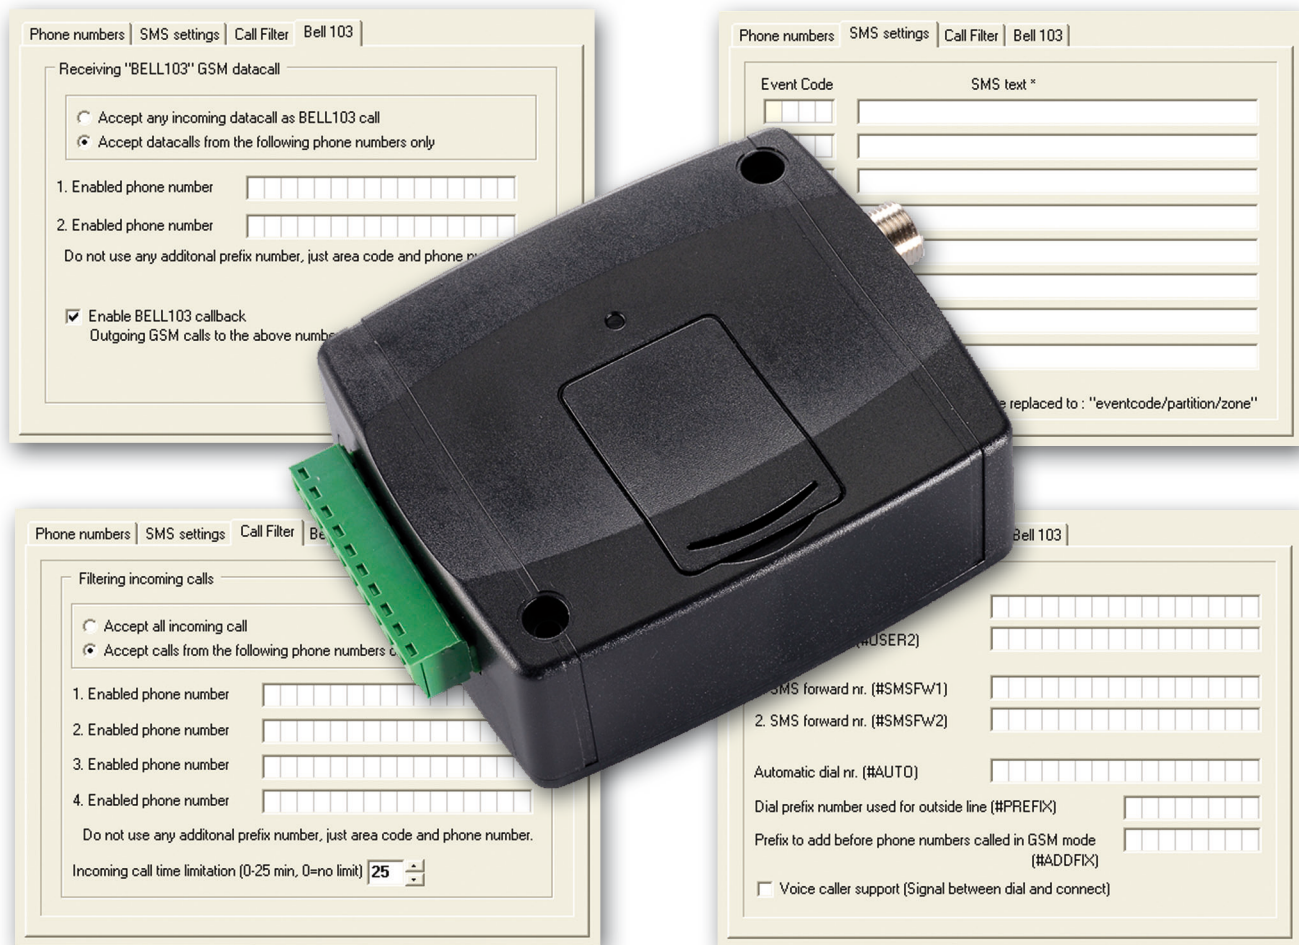

Compact GSM communicator

► Main features:

- Telephone line emulator
- PSTN line management
- BELL103 / V.21 modem simulation
- Programmable through USB

► Technical data:

- Transmission frequency:
GSM 900/1800 MHz or
GSM 850/1900 MHz
- GSM phone type:
Simcom SIM340
- Supply voltage:
9-24 VDC
- Current consumption:
Nominal: 100mA
Maximum: 500mA
- Operating temperature:
-20°C - +70°C
- Dimensions:
84 x 72 x 32mm
- Weight: 200g

► Characteristics of the GSM Adapter Mini:

- Adaption of alarm control panels which use PSTN phone line to GSM network, in two ways:
 - PSTN line supervision: switches to GSM transmission as redundancy line in case of sabotage or service failure
 - Direct GSM mode: forwards all events through GSM connection by default
- Instant reporting to monitoring station with Contact-ID or Ademco Express protocol
- SMS sending initiated by Contact-ID event codes to 2 phone numbers
- Forwarding of incoming SMS messages (balance information of non-subscription type cards, etc.)
- Remote programming of alarm control panels (Paradox, DSC) (BELL103 / V.21 modem simulation)
- Phone number restriction on incoming calls

www.tell.hu